


	_			Γ -
mils	mils	mils	mils	sim +
∞	4	=	22	4
MW	MM	MM	MM	MM
0.200	0.100 MM 4 mils	0.250 MM 10 mils	0.550 MM 22 mils	0.350 MM 14 mils
A). LEAD FRAME THICKNESS 0.200 MM 8 mils	B). LEAD FRAME FORM	C). MOLD CAP THICKNESS	A+B+C	B+C

FIG.6B



SUBSTITUTE SHEET (RULE 26)

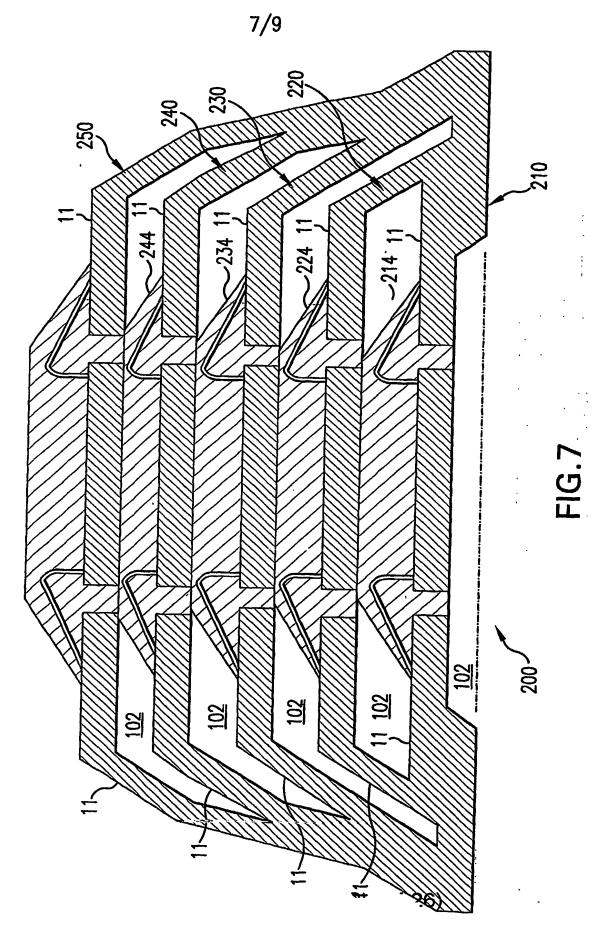